REVISIONS				
LET.	DESCRIPTION	DATE	BY	CAD
X	XXXXXXXXXXXXXX	XX/XX/XX	XXX	XXX

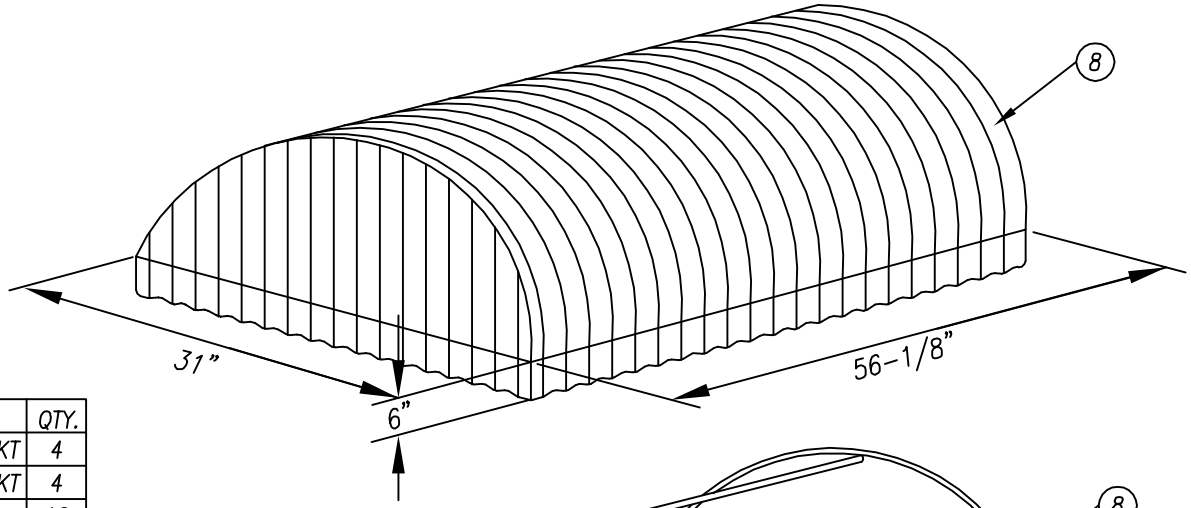

ITEM	PART No.	DESCRIPTION	QTY.
1	47538	LOWER SUPPORT POLE BRKT	4
2	46603	UPPER SUPPORT POLE BRKT	4
3	13164	1/4-20 X 3/4 HEX BOLT	16
4	42361	HEX NUT 1/4-20 ESLOK	16
5	87261	1/4" WASHER	16
6	46610	SET SCREW 1/4-20 X 1/4	4
7	67392	UPRIGHT ST STL POLE 55.5"	4
8	67391	RED STEEL STITCH AWNING	1

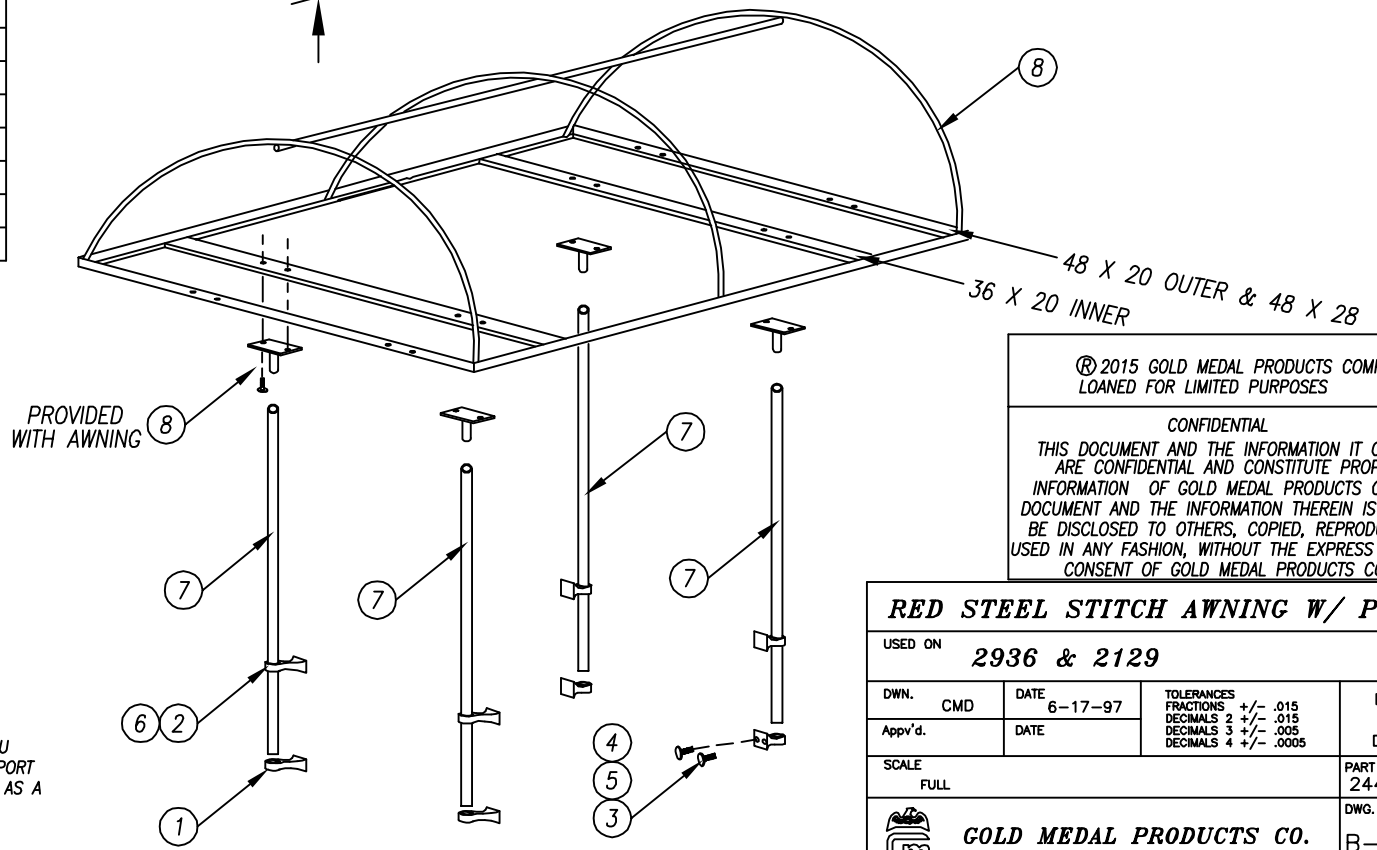

ASSEMBLY INSTRUCTIONS:

1) DISONNECT POWER SUPPLY.
2) MOUNT CASTINGS ITEMS 1 AND 2 TO CART WITH HARDWARE ITEMS 3, 4, AND 5.
3) INSERT POLES ITEM 7 INTO CASTINGS ITEMS 1 AND 2 USING SET SCREW ITEM 6 SECURE POLES INTO POSITION.
4) THE AWNING COMES PRE-DRILLED TO MOUNT TO EITHER A 48" X 20" CART OR A 36" X 20" CART. SEE NOTE 7 IF YOUR CART IS A 48" X 28" CART.
5) IF YOUR CART IS A 36" X 20" CART THE FOUR TEE BRACKETS SUPPLIED WILL LOCATE TO THE TWO INNER CROSS SUPPORTS NOTED.
6) IF YOUR CART IS A 48" X 20" CART THE FOUR TEE BRACKETS SUPPLIED WILL LOCATE TO THE TWO OUTER CROSS SUPPORTS NOTED.
7) TO MOUNT THIS AWNING TO A 48" X 28" CART YOU MUST DRILL FOUR SETS OF TWO EACH 5/16" DIAMETER HOLES THRU AWNING FRAME-WORK OUTER CROSS SUPPORTS. LOCATE SUPPORT POLE CENTERS TO FRAME-WORK AND USE THE TEE BRACKET AS A TEMPLATE TO LOCATE THE 5/16" DIAMETER HOLES.

® 2015 GOLD MEDAL PRODUCTS COMPANY
LOANED FOR LIMITED PURPOSES

CONFIDENTIAL
THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE CONFIDENTIAL AND CONSTITUTE PROPRIETARY INFORMATION OF GOLD MEDAL PRODUCTS CO. THIS DOCUMENT AND THE INFORMATION THEREIN IS NOT TO BE DISCLOSED TO OTHERS, COPIED, REPRODUCED OR USED IN ANY FASHION, WITHOUT THE EXPRESS WRITTEN CONSENT OF GOLD MEDAL PRODUCTS CO.

RED STEEL STITCH AWNING W/ POLES

USED ON **2936 & 2129**

DWN.	DATE	TOLERANCES	DO NOT SCALE DRAWING
CMD	6-17-97	FRACTIONS +/- .015 DECIMALS 2 +/- .015 DECIMALS 3 +/- .005 DECIMALS 4 +/- .0005	
Appv'd.	DATE		

SCALE FULL

PART NO. 2444

DWG. NO. B-12375

GOLD MEDAL PRODUCTS CO.
CINCINNATI, OHIO 45241